Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 4/18/2017							
	r Information						
Owner Name: Golf Villas One Condominium Contact Person:							
Address: 9930-9958 Perfect Drive				` ′	` ′		
City: I	Port St. Lucie	Zip: 34986		Work Phone:			
County	St. Lucie			Cell Phone:			
Insurai	nce Company:			Policy #:			
Year of Home: 1996 # of Stories: 2 Email: ronaldsndrs@yahoo.com							
accom	: Any documentation used in pany this form. At least one p 17. The insurer may ask add	photograph must acc	company this form to valid	ate each attribute marke	ed in questions 3		
	 Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)? A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with 						
	a date after 3/1/2002: Building				anni appneation with		
	B. For the HVHZ Only: Built provide a permit application w	in compliance with the vith a date after 9/1/19	e SFBC-94: Year Built 94: Building Permit Applica	For homes built in 1 ation Date (MM/DD/YYYY)	994, 1995, and 1996		
	C. Unknown or does not meet						
OR	of Covering: Select all roof covering: Year of Original Installation/Revering identified.						
COV	2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval#	Year of Original Installation or Replacement	No Information Provided for Compliance		
	☐ 1. Asphalt/Fiberglass Shingle	/					
	2. Concrete/Clay Tile	01 / 13 / 2017	Prmt#: 1701-0248				
	3. Metal						
	4. Built Up						
	5. Membrane	/					
	_	//					
	6. Other	//					
	A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.						
	B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.						
	C. One or more roof coverings	s do not meet the requi	irements of Answer "A" or	"B".			
	D. No roof coverings meet the	requirements of Answ	wer "A" or "B".				
3. Ro	of Deck Attachment: What is	the weakest form of ro	oof deck attachment?				
	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
	C. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groov decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR						
Insnec	Inspectors Initials FC Property Address 9930-9958 Perfect Drive Port St. Lucie, FL 34986						

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or



 □ D. Reinforced Concrete Roof Deck. □ E. Other: □ F. Unknown or unidentified. □ G. No attic access. 4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks with 5 feet of the inside or outside corner of the roof in determination of WEAKEST type) □ A. Toe Nails □ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attach the top plate of the wall, or □ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: □ Secured to truss/rafter with a minimum of three (3) nails, and □ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. □ B. Clips □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. □ C. Single Wraps □ Metal Connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
 □ E. Other: □ F. Unknown or unidentified. □ G. No attic access. 4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks with 5 feet of the inside or outside corner of the roof in determination of WEAKEST type) □ A. Toe Nails □ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attachment the top plate of the wall, or □ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: □ Secured to truss/rafter with a minimum of three (3) nails, and □ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. □ B. Clips □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. □ C. Single Wraps □ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
 G. No attic access. 4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks with 5 feet of the inside or outside corner of the roof in determination of WEAKEST type) A. Toe Nails □ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached the top plate of the wall, or under the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: ■ Secured to truss/rafter with a minimum of three (3) nails, and ■ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. □ B. Clips □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. ■ C. Single Wraps □ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks with 5 feet of the inside or outside corner of the roof in determination of WEAKEST type) □ A. Toe Nails □ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached the top plate of the wall, or □ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: □ Secured to truss/rafter with a minimum of three (3) nails, and □ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap for the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. □ B. Clips □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. □ C. Single Wraps □ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured we minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured we a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
 5 feet of the inside or outside corner of the roof in determination of WEAKEST type) A. Toe Nails □ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attache the top plate of the wall, or □ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: ■ Secured to truss/rafter with a minimum of three (3) nails, and ■ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. □ B. Clips □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. ■ C. Single Wraps ■ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
 □ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attache the top plate of the wall, or □ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: ■ Secured to truss/rafter with a minimum of three (3) nails, and ■ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap for the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. □ B. Clips □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. ■ C. Single Wraps ■ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	thin
the top plate of the wall, or Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured we minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured we a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured we minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured we a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	d to
 Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
 Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured we minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured we a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured was minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
 □ Metal connectors that do not wrap over the top of the truss/rafter, or □ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. □ C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured w minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured w a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	m
 Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured we minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured we a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	
position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured w minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured w a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
 Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured we minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. □ Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured we a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or 	nai
minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured v a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured v a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	th a
beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured va minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
☐ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall both sides, and is secured to the top plate with a minimum of three nails on each side.	on
☐ E. Structural Anchor bolts structurally connected or reinforced concrete roof.	
☐ F. Other:	
☐ G. Unknown or unidentified	
☐ H. No attic access	
5. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or w of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).	ıll
☐ A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: feet	
B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft	
C. Other Roof Any roof that does not qualify as either (A) or (B) above.	
 6. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to 	tho
sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the	tiic
dwelling from water intrusion in the event of roof covering loss.	
☐ B. No SWR.	
☐ C. Unknown or undetermined.	
Inspectors Initials FC Property Address 9930-9958 Perfect Drive Port St. Lucie, FL 34986	
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or	DM

Page 2 of 4

inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

7. <u>Opening Protection</u>: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	N/A		Х
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Х				Х	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials FC _ Property Address _9930-9958 Perfect Drive Port St. Lucie, FL 34986

• For Garage Doors Only: ANSI/DASMA 115

☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
<u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



the table above

protective coverings not meeting the requirements	of Answer "A", "B	no documentation) All Glazed openings are protected wB", or C" or systems that appear to meet Answer "A" or "			
with no documentation of compliance (Level N in the table above).					
□ N.1 All Non-Glazed openings classified as Level A, B		• •			
 □ N.2 One or More Non-Glazed openings classified as I table above 	Level D in the table al	above, and no Non-Glazed openings classified as Level X in the			
☐ N.3 One or More Non-Glazed openings is classified as	s Level X in the table	le above			
X. None or Some Glazed Openings One or more	Glazed openings cl	classified and Level X in the table above.			
		ED BY A QUALIFIED INSPECTOR. of individuals who may sign this form.			
Qualified Inspector Name: Frank Calabrese	License Type:	License or Certificate #: 9955			
Inspection Company: Atlantic Property Inspections LLC for Don Meyler Inspections	111	Phone: (954) 972-7311			
Qualified Inspector – I hold an active license	as a: (check on	ne)			
Home inspector licensed under Section 468.8314, Florida Straining approved by the Construction Industry Licensing E		impleted the statutory number of hours of hurricane mitigation on of a proficiency exam.			
☐ Building code inspector certified under Section 468.607, Fl	lorida Statutes.				
$\hfill \Box$ General, building or residential contractor licensed under S	ection 489.111, Flori	rida Statutes.			
\square Professional engineer licensed under Section 471.015, Flor	ida Statutes.				
\square Professional architect licensed under Section 481.213, Flor	ida Statutes.				
☐ Any other individual or entity recognized by the insurer as verification form pursuant to Section 627.711(2), Florida S		ssary qualifications to properly complete a uniform mitigation			
Individuals other than licensed contractors licensed ur under Section 471.015, Florida Statues, must inspect tl			Ī		
Licensees under s.471.015 or s.489.111 may authorize	a direct employee				
experience to conduct a mitigation verification inspect	<u>ion.</u>				
I, <u>Frank Calabrese</u> am a qualified inspec	ctor and I personal	ally performed the inspection or (licensed			
contractors and professional engineers only) I had my e		spector Is Licensed) perform the inspection (print name of inspector)			
and I agree to be responsible for his/her work.					
Qualified Inspector Signature:		Date:4/18/2017			
An individual or entity who knowingly or through gro			<u>a is</u>		
subject to investigation by the Florida Division of Insu appropriate licensing agency or to criminal prosecutio			10		
certifies this form shall be directly liable for the miscon performed the inspection.			<u></u>		
Hamaayynay ta aamplatas I sartify that the named Our	alified Inspector or	which are how appealance did norforms on increasion of the			
<u>Homeowner to complete</u> : I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.					
Signature: Date:					
Signature:	Date:4	4/18/2017			
An individual or entity who knowingly provides or utt obtain or receive a discount on an insurance premium of the first degree. (Section 627.711(7), Florida Statute	to which the indiv		r		
The definitions on this form are for inspection purpose as offering protection from hurricanes.	es only and cannot	ot be used to certify any product or construction feature	re		
Inspectors Initials FC Property Address 9930-9958	Perfect Drive Port	rt St. Lucie. FL 34986			

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

DMI Quality Control Approved 4/20/2017



Elevation Photos





Front Elevation



Left Elevation



Back Elevation



Right Elevation

Roof/Attic Photos





Concrete/Clay Tile Roof Covering



8d Nails or Greater in Size Spaced 6" Along the Edge



8d Nails or Greater in Size



8d Nails or Greater in Size Spaced 6" in the Field







5/8" Deck Thickness Confirmed



Single Wrap



Single Wrap



Unprotected Window







Unprotected Window



Unprotected Window



Unprotected Solid Entry Door




Unprotected Glazed Entry Door







Unprotected Glazed Entry Door

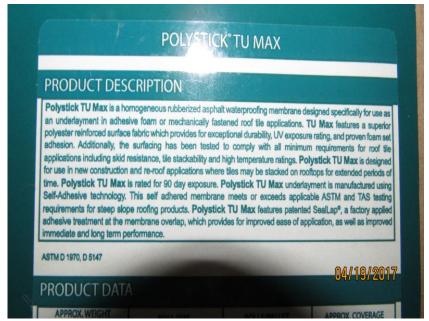

Documentation Displaying Installation of Approved SWR



Re-Roofing Permit. Documentation Displaying Installation of Approved SWR



Address Number







Complex Identifier



Documentation Displaying Installation of Approved SWR



Wall Construction Estimate

9930-9958 Perfect Drive

Please note that at as a courtesy to your insurance agent or carrier, we have included below our estimate of the Wall Construction percentages of your home, classified between wood frame, masonry/concrete, or other wall construction types.

Wood Frame:	_20_%
Masonry/Concrete:	80_%
Other	%

- DMI assumes no liability whatsoever for the accuracy of this wall construction estimate.
- These percentages are provided as a courtesy and on a best-efforts basis, based on a cursory survey of the property
 while separately performing a windstorm mitigation inspection. This estimated data was previously provided on the
 windstorm mitigation inspection itself, and as many industry participants would still like to see it along with the mitigation
 inspection, DMI has elected to voluntarily provide it.
- Note that per the guidelines provided by certain insurance carriers, 1) gable end walls are included in the above wall construction percentages, and 2) the openings associated with doors and windows are not taken into account when calculation the estimated percentages.